

SOD-523 Plastic-Encapsulate Diodes

BAT64X SCHOTTKY BARRIER DIODE

FEATURES


- For low-loss, fast-recovery, meter protection, bias isolation and clamping application
- Integrated diffused guard ring
- Low forward

MARKING: t



t = Device code

The marking bar indicates the cathode

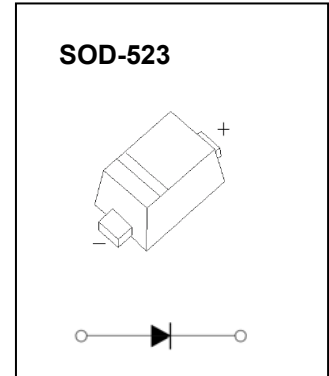





Maximum Ratings (T_a=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak reverse voltage	V _{RM}	40	V
DC reverse	V _R		
Non-repetitive Peak surge forward current @t=8.3ms	I _{FSM}	0.8	A
Mean rectifying current	I _O	0.25	A
Power Dissipation	P _D	150	mW
Thermal Resistance from Junction to Ambient	R _{θJA}	667	°C/W
Operating Junction Temperature Range	T _j	-40~+125	°C
Storage Temperature Range	T _{stg}	-55~+150	°C




Electrical Ratings (T_a=25°C unless otherwise noted)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Reverse breakdown voltage	V _R	40			V	I _R =10μA
Forward voltage	V _F			350 430 520 750	mV	I _F =1mA I _F =10mA I _F =30mA I _F =100mA
Reverse current	I _R			2	μA	V _R =30V
Capacitance between terminals	C _T			6	pF	V _R =1V, f=1MHz
Reverse recovery time	t _{rr}			5	ns	I _F =10mA, I _R =10mA, I _R =1mA, R _L =100Ω

Typical Characteristics

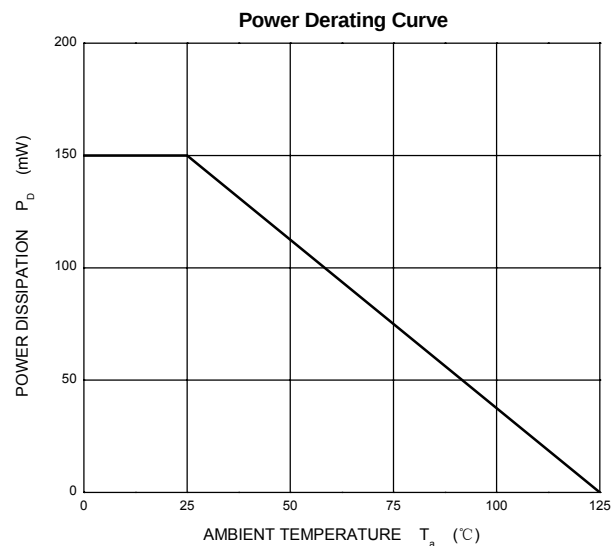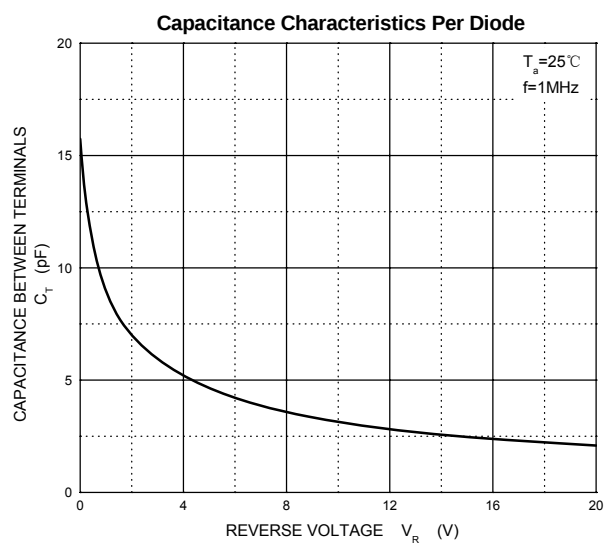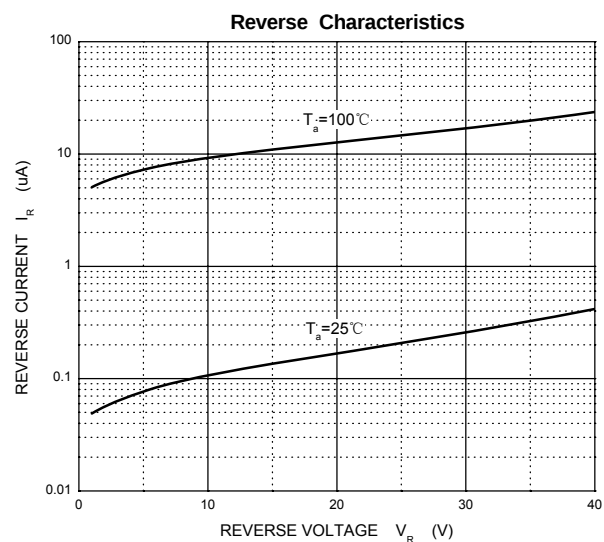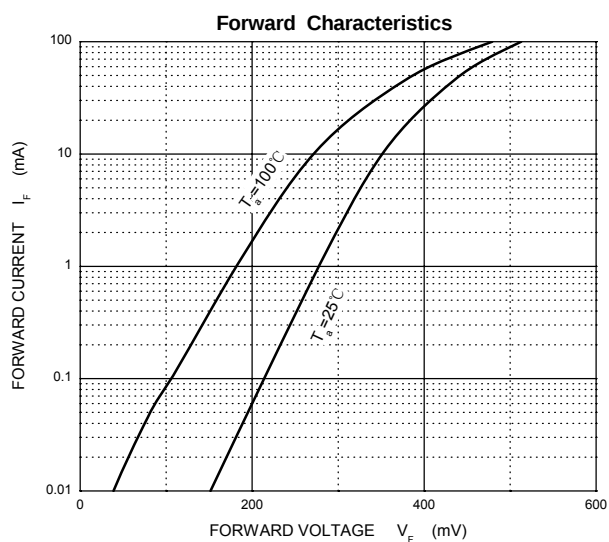


SOD-523 Package Outline Dimensions

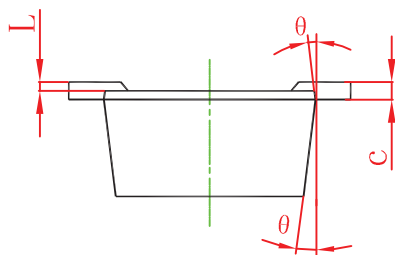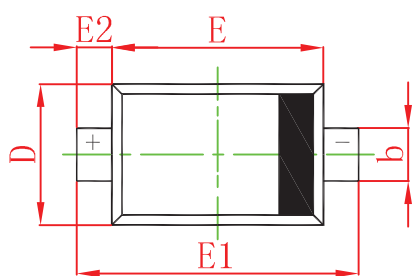

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.510	0.770	0.020	0.031
A1	0.500	0.700	0.020	0.028
b	0.250	0.350	0.010	0.014
c	0.080	0.150	0.003	0.006
D	0.750	0.850	0.030	0.033
E	1.100	1.300	0.043	0.051
E1	1.500	1.700	0.059	0.067
E2	0.200 REF		0.008 REF	
L	0.010	0.070	0.001	0.003
θ	7° REF		7° REF	

SOD-523 Suggested Pad Layout

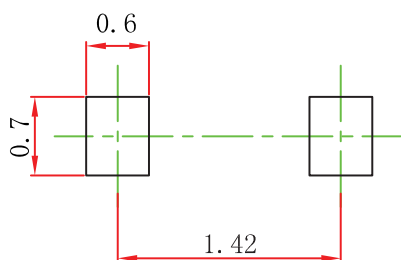


Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

NOTICE

JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.


SOD-523 Embossed Carrier Tape

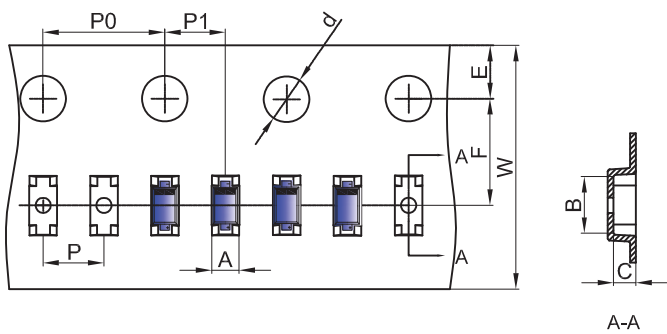


Packaging Description:
SOD-523 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 8,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOD-523	0.9	1.94	0.73	Ø1.50	1.75	3.50	4.00	2.00	2.00	8.00
(Tolerance)	+/-0.05	+/-0.05	+/-0.05	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+/-0.1	+0.3/-0.1

SOD-523 Tape Leader and Trailer

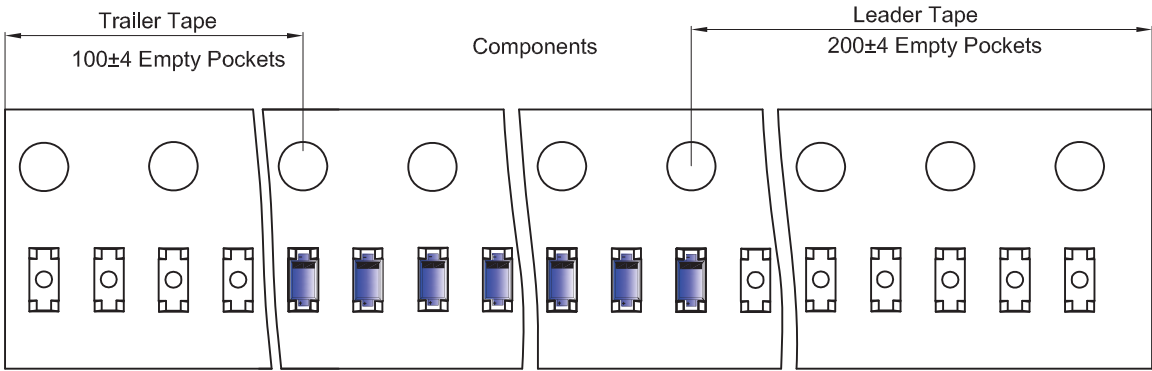

SOD-523 Reel

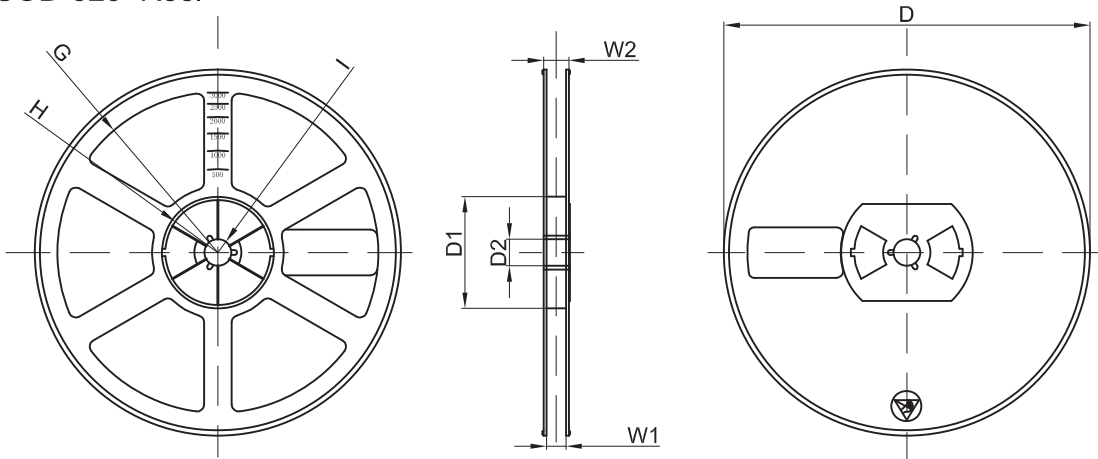

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30
Tolerance	+/-2	+/-1	+/-1	+/-1	+/-1	+/-1	+/-1	+/-1

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
8000 pcs	7 inch	120,000 pcs	203×203×195	480,000 pcs	438×438×220	