



## SMAF Plastic-Encapsulate Diodes

### S3AF THRU S3MF General Purpose Rectifier Diodes

#### Features


- $I_{F(AV)}$  3A
- $V_{RRM}$  50V-1000V
- High surge current capability
- Polarity: Color band denotes cathode

#### Applications

- Rectifier

#### Marking

- S3X
- X : From A To M

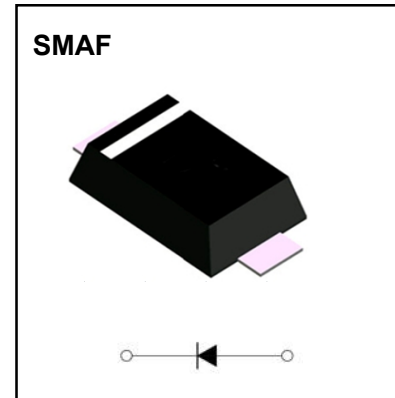

#### Limiting Values(Absolute Maximum Rating)

| Item                                             | Symbol         | Unit             | Test Conditions                                                    | S3         |     |     |     |     |     |      |
|--------------------------------------------------|----------------|------------------|--------------------------------------------------------------------|------------|-----|-----|-----|-----|-----|------|
|                                                  |                |                  |                                                                    | AF         | BF  | DF  | GF  | JF  | KF  | MF   |
| Repetitive Peak Reverse Voltage                  | $V_{RRM}$      | V                |                                                                    | 50         | 100 | 200 | 400 | 600 | 800 | 1000 |
| Maximum RMS Voltage                              | $V_{RMS}$      | V                |                                                                    | 35         | 70  | 140 | 280 | 420 | 560 | 700  |
| Average Forward Current                          | $I_{F(AV)}$    | A                | 60Hz Half-sine wave,<br>Resistance load, $T_L = 100^\circ\text{C}$ | 3.0        |     |     |     |     |     |      |
| Surge(Non-repetitive)Forward Current             | $I_{FSM}$      | A                | 60Hz Half-sine wave,<br>1 cycle, $T_a = 25^\circ\text{C}$          | 90         |     |     |     |     |     |      |
| Operation Junction and Storage Temperature Range | $T_J, T_{STG}$ | $^\circ\text{C}$ |                                                                    | -55 ~ +150 |     |     |     |     |     |      |

#### Electrical Characteristics (T=25°C Unless otherwise specified)

| Item                                   | Symbol           | Unit               | Test Condition                                               | S3                        |    |    |    |    |    |    |
|----------------------------------------|------------------|--------------------|--------------------------------------------------------------|---------------------------|----|----|----|----|----|----|
|                                        |                  |                    |                                                              | AF                        | BF | DF | GF | JF | KF | MF |
| Peak Forward Voltage                   | $V_F$            | V                  | $I_F = 3.0\text{A}$                                          | 1.1                       |    |    |    |    |    |    |
| Peak Reverse Current                   | $I_{RRM1}$       | $\mu\text{A}$      | $V_{RM} = V_{RRM}$                                           | $T_a = 25^\circ\text{C}$  |    |    |    |    |    |    |
|                                        | $I_{RRM2}$       |                    |                                                              | $T_a = 100^\circ\text{C}$ |    |    |    |    |    |    |
| Thermal Resistance(Typical)            | $R_{\theta J-A}$ | $^\circ\text{C/W}$ | Between junction and ambient                                 | 88                        |    |    |    |    |    |    |
| Typical junction capacitance per diode | $C_J$            | pF                 | Measured at 1.0MHz and applied reverse voltage of 4.0 volts. | 15                        |    |    |    |    |    |    |

## Typical Characteristics

FIG.1: FORWARD CURRENT DERATING CURVE

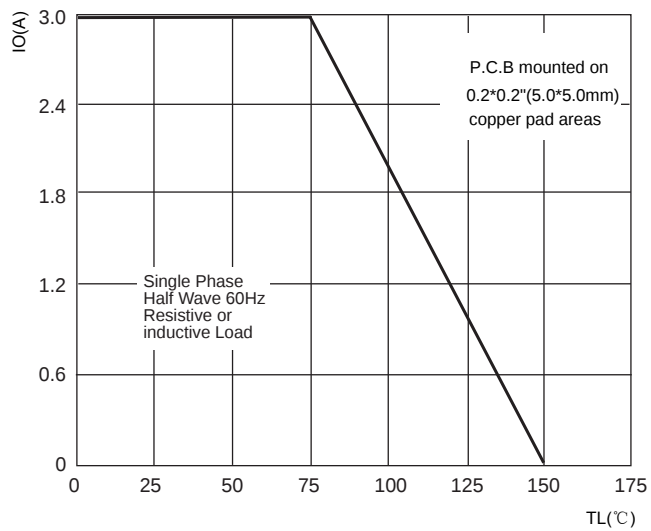


FIG2: Surge Forward Current Capability

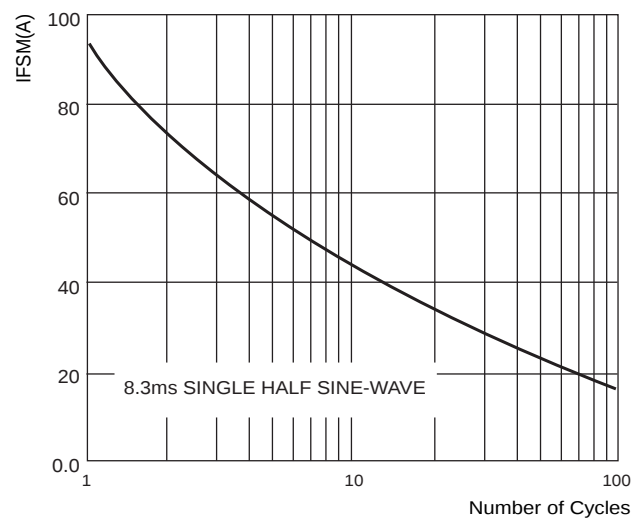


FIG.3: TYPICAL FORWARD CHARACTERISTICS



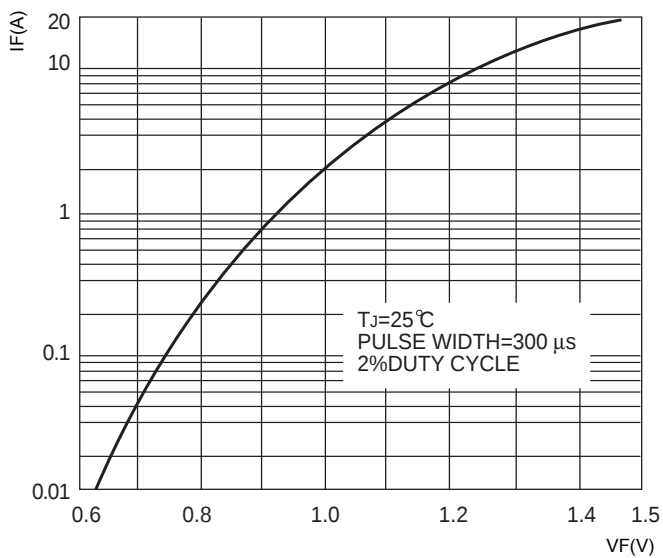


FIG.4 : TYPICAL REVERSE CHARACTERISTICS

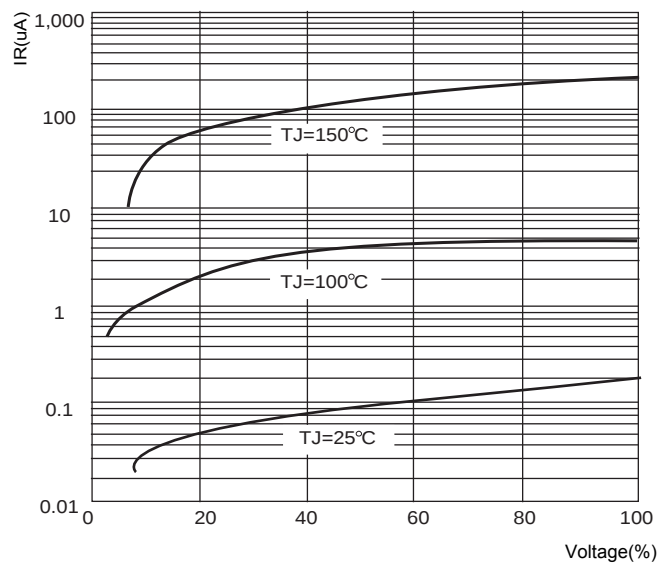


## SMAF Package Outline Dimensions

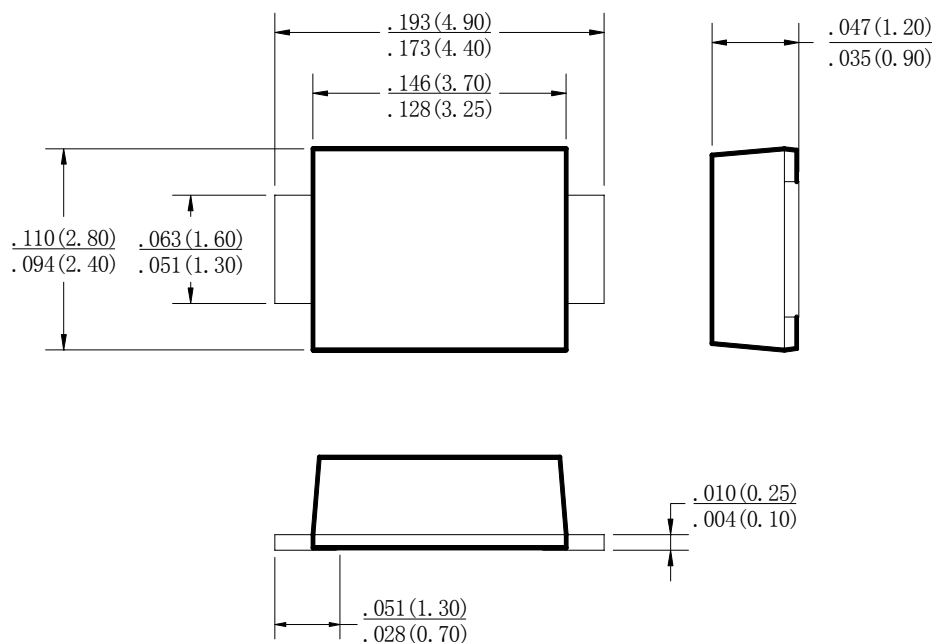

Dimensions in inches and (millimeters)

## SMAF Suggested Pad Layout

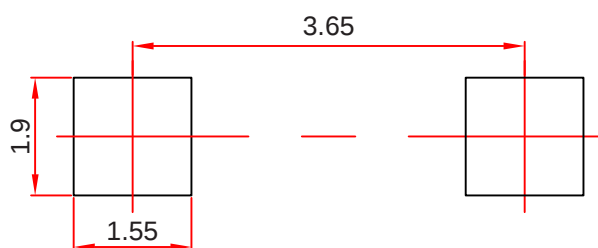

### Note:

1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.

### NOTICE

JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.